

# API

## RADIAN 3D Laser Tracker Systems





## A FOCUS ON AUTOMATION

The API industrial laser tracker legacy continues with the latest RADIANT™ tracker series offering the smallest, lightest and most accurate portable trackers on the market allowing both faster and easier measurements.

API's compact and rigid UNIBODY tracker design includes shaft mounted laser, motors, and encoders. The UNIBODY shaft-mounted laser innovation minimizes Abbe offset errors, while also housing laser source, optics, camera and major head electronics in the center of the tracker body. The central location of all heat sources, allows rapid distribution of heat throughout the body during warm-up or drastic ambient temperature variations. This ensures the tracker maintains constant and symmetrical heat equilibrium throughout its operation, resulting in a shorter warm-up time and superior measurement stability.

**FOR MORE THAN  
30 YEARS API  
HAS PIONEERED  
LASER-BASED  
EQUIPMENT FOR  
MEASUREMENT AND  
CALIBRATION**

The rigid UNIBODY instrument casting offers innovative „air-over cooling“ minimizing thermal effects, which provides increased temperature stability, faster start-up times, and further reducing instrument error enhancing overall measuring performance. Competitive trackers, with side-mounted lasers, create unbalanced heat sources requiring complex and lengthy warm-up routines involving extended thermal stabilization periods before accurate measurements can be performed.

API's integrated controller offers cable-less and hazard-free tracker operation in confined spaces. Onboard Wi-Fi reduces system setup and provides seamless operation.

API's wide-angle iVision™ fast autolock allows rapid recapture of lost laser beam providing effortless usability for difficult to access and interrupted line of sight measurements. The combination of onboard

and external batteries provide 8 hours of continuous operation.

## A PASSION FOR PRECISION

RADIANT Pro, Plus, and Core models provide a solution to match every customer application and budget for trusted large-scale portable coordinate metrology solutions. An extended range of hand-held tactile and laser scanning probes compliment the RADIANT's measurement and reverse engineering capabilities further extending the RADIANT tracker measurement reach.

RADIANT 6D trackers can be enhanced with calibration tools to perform dynamic calibration and tracking of industrial robots and machine tools providing enhanced performance of manufacturing processes by reducing process variation.



LASER TRACKER  
1988



TRACKER 2  
1999



TRACKER 2 PLUS  
2002



TRACKER 3  
2005



RADIANT  
CURRENT



# RADIAN MEASUREMENT AND ACCESSORIES



## SMR MEASUREMENT

API's break resistant Spherically Mounted Retroreflectors (SMR) are constructed with a one piece optic eliminating risks associated with glass panels shifting, separating or fracturing and can track over 80m with optical centering accuracy down to  $\pm 2.5$  microns offering high accuracy line of sight measurement.



## HANDHELD PROBING

The API vProbe™ hand-held, light-weight, wireless tactile probe with easy-hold grip stylus allows the Laser Tracker to perform extended coordinate measurement functions by measuring intricate features or part characteristics outside the line of site of the tracker set-up providing fast and accurate measurements. The vProbe offers more versatility than a portable arm CMM and inherently more suitable for larger parts. Probe Stylus Recognition uses RFID technology to automatically identify probe length and tip size, eliminating manual selection during measurements. Dynamic tactile scanning capability provides instant coordinate feedback with integrated battery providing 6-8 hours of measurement activity. Styli lengths up to 500mm can be accommodated. In addition, the Smart Button function ensures easier use. Weighing only 580g, the vProbe is the lightest probe on the market.






## HANDHELD SCANNING

The iScan3D is a compact and highly accurate handheld scanner. Integrated with Radian Plus and Pro Laser Trackers, iScan3D's crossed blue laser lines are capable of scanning in any direction. Dual stylus-mounting locations for probing of hidden features provide measurement flexibility with precise results. iScan3D can scan a wide variety of surface textures, including high-gloss and contrast areas. It also provides unique probing ability for hidden-point measurements.



## RADIAN ACCESSORIES

|                          | PRO  | PLUS  | CORE  |
|--------------------------|---|--|--|
| SMR Measurement          | ✓   | ✓  | ✓  |
| vProbe Hand-Held Probing | ✓   | ✓  |  |
| iScan3D                  | ✓   | ✓  |  |
| Active Target            | ✓   | ✓  | ✓  |
| SmartTrack Sensor        | ✓   | ✓*   |  |

All accessories have a measuring range up to the maximum tracking distance of the respective laser tracker. Built-in 6DoF sensor allows tracker accuracy to be maintained throughout its entire operating distance.

\*Only with RMS

# RADIAN **AUTOMATION AND CALIBRATION**

Integrated API 6DoF laser tracker within robotic machining, inspection, and guidance cells provide real-time adaptive control offering improved metrological performance and improved quality of manufacturing processes.



## Active Target™

Active Target™ is a battery-powered self-orientating motorized 360° rotation SMR that locks onto the laser tracker and automatically orientates to the laser beam allowing for automated tracking and measurements of machine tools, industrial robots, or automation where a standard SMR cannot perform.

**CALIBRATION:** API 6DoF laser trackers combined with unique API calibration tools provide dynamic calibration and tracking of industrial robots and machine tools providing enhanced performance of manufacturing processes by reducing process variation.



## SmartTrack™ Sensor

SmartTrack™ provides automatic 6DoF measurement for dynamic accuracy applications by determining the position (x, y, z) and angular orientation (pitch, yaw, roll) of a tracked point in real-time revealing the true position and orientation of a moving target such as a robotic end-effector. Applications include machine tool and robot calibration and dynamic robot accuracy enhancement.



# LASER TRACKER **APPLICATIONS**

Each manufacturing industry sector has unique metrology requirements. The API RADIAN laser tracker range and measurement accessories offer a highly flexible, portable coordinate measuring solution with applications across all industries. API has customers globally in all sectors and has accumulated a wealth of application experience in aerospace, automotive, energy, heavy machinery, agricultural equipment, military & defense, machine tools, automation and tooling.

RADIAN excels at high-definition surface scanning with feature extraction to automation and machine control; from hidden-point probing to traditional dynamic 3D reflector measurement: the Radian is the first-choice of laser tracker system in a wide range of industries.

- Alignment & Calibration
- Part Measurement
- Jigs, Fixture & Tooling Inspection
- Reverse Engineering
- Adaptive Control
- Robot Tracking





# LASER TRACKER SUSTAINABILITY

Manufactured in the USA, all RADIAN laser trackers are supplied with the industry's most comprehensive 2 year parts and labor warranty. API offers all-inclusive tracker calibration and maintenance contracts that can also include our loaner tracker program and advance reservation calibration program.

Supported globally through subsidiary offices in Europe, China, India, and master reseller partnerships, API offers the level of support demanded by our sophisticated international customers. We are where you are.

## TECHNICAL SPECIFICATIONS


|                                   | PRO                        | PLUS                       | CORE                       |
|-----------------------------------|----------------------------|----------------------------|----------------------------|
| Working Range                     | ADM/IFM - 3D/6D            | ADM - 3D/6D                | ADM - 3D                   |
| Rotational Envelope               | 20m / 50m / 80m            | 50m / 80m                  | 50m / 80m                  |
| Horizontal (Infinite)             | ±320° (640°)               | ±320° (640°)               | ±320° (640°)               |
| Vertical (Infinite)               | -59° - +79° (138°)         | -59° - +79° (138°)         | -59° - +79° (138°)         |
| Data Output Rate                  | 1000 points/sec.           | 1000 points/sec.           | 1000 points/sec.           |
| Distance Measurement Performance  |                            |                            |                            |
| Resolution                        | 0.5 µm                     | 0.5 µm                     | 0.5 µm                     |
| Accuracy (MPE)                    | 10µm or 0.7µm/m*           | 10µm or 0.7µm/m*           | 10µm or 0.7µm/m*           |
| IFM Accuracy                      | 0.5µm/m                    | -                          | -                          |
| Measurement Performance           |                            |                            |                            |
| Volumetric Accuracy (MPE)         | 10µm + 5µm/m               | 15µm + 5µm/m               | 15µm + 5µm/m               |
| Precision Level Accuracy          | ±2 arc seconds             | ±2 arc seconds             | ±2 arc seconds             |
| Maximum Radial Velocity           | 180°/sec                   | 180°/sec                   | 180°/sec                   |
| Maximum Radial Acceleration       | 180°/sec <sup>2</sup>      | 180°/sec <sup>2</sup>      | 180°/sec <sup>2</sup>      |
| Autolock Performance              |                            |                            |                            |
| iVision Field of View             | 30° (diagonal)             | 30° (diagonal)             | 30° (diagonal)             |
| Acquisition Range                 | 2m – 40m                   | 2m – 40m                   | 2m – 40m                   |
| Attributes                        |                            |                            |                            |
| Tracker Size                      | 177mm <sup>2</sup> x 355mm | 198mm <sup>2</sup> x 430mm | 198mm <sup>2</sup> x 430mm |
| Tracker Weight                    | 9.0 kg                     | 10.9 kg                    | 10.9 kg                    |
| Controller Size                   | 110 x 177 x 355mm          | Integrated                 | Integrated                 |
| Controller Weight                 | 3.2 kg                     | Integrated                 | Integrated                 |
| Combined Weight                   | 12.2 kg                    | 10.9 kg                    | 10.9 kg                    |
| Transport Case                    | 610x508x290mm              | 559x406x254mm              | 559x406x254mm              |
| Total Transport Weight            | 28.2 kg                    | 22.7 kg                    | 22.7 kg                    |
| WiFi                              |                            | ✓                          | ✓                          |
| Ethernet                          | ✓                          | ✓                          | ✓                          |
| Laser Emission                    | Class II IEC60825-1        | Class II IEC60825-1        | Class II IEC60825-1        |
| Warm-up Time                      | 15 Minutes                 | 15 Minutes                 | 15 Minutes                 |
| Power Specifications              |                            |                            |                            |
| Power Supply Voltage              | 110/230V ±10%              | 110/230V ±10%              | 110/230V ±10%              |
| Power Consumption                 | 100W                       | 60W                        | 60W                        |
| Internal Battery                  |                            | ✓                          | ✓                          |
| External Power Pack               |                            | ✓                          | ✓                          |
| Continuous Operation Battery Life | -                          | 8 Hours**                  | 8 Hours**                  |
| Environmental                     |                            |                            |                            |
| Operating Temperature             | -10°C to 45°C              | -10°C to 45°C              | -10°C to 45°C              |
| Relative Humidity                 | 10–95%***                  | 10–95%***                  | 10–95%***                  |
| Altitude                          | -700m to 3000m             | -700m to 3000m             | -700m to 3000m             |
| IP Rated                          |                            | ✓                          | ✓                          |

\*Whichever is greater \*\*Hot swappable with battery pack \*\*\*Non-condensating

# RADIAN LASER TRACKER TECHNICAL FEATURES



API 2 Year Warranty - API offers the industry benchmark warranty on its RADIAN laser trackers and accessories for a period of 24 months on parts and labor. Full terms and conditions available upon request.

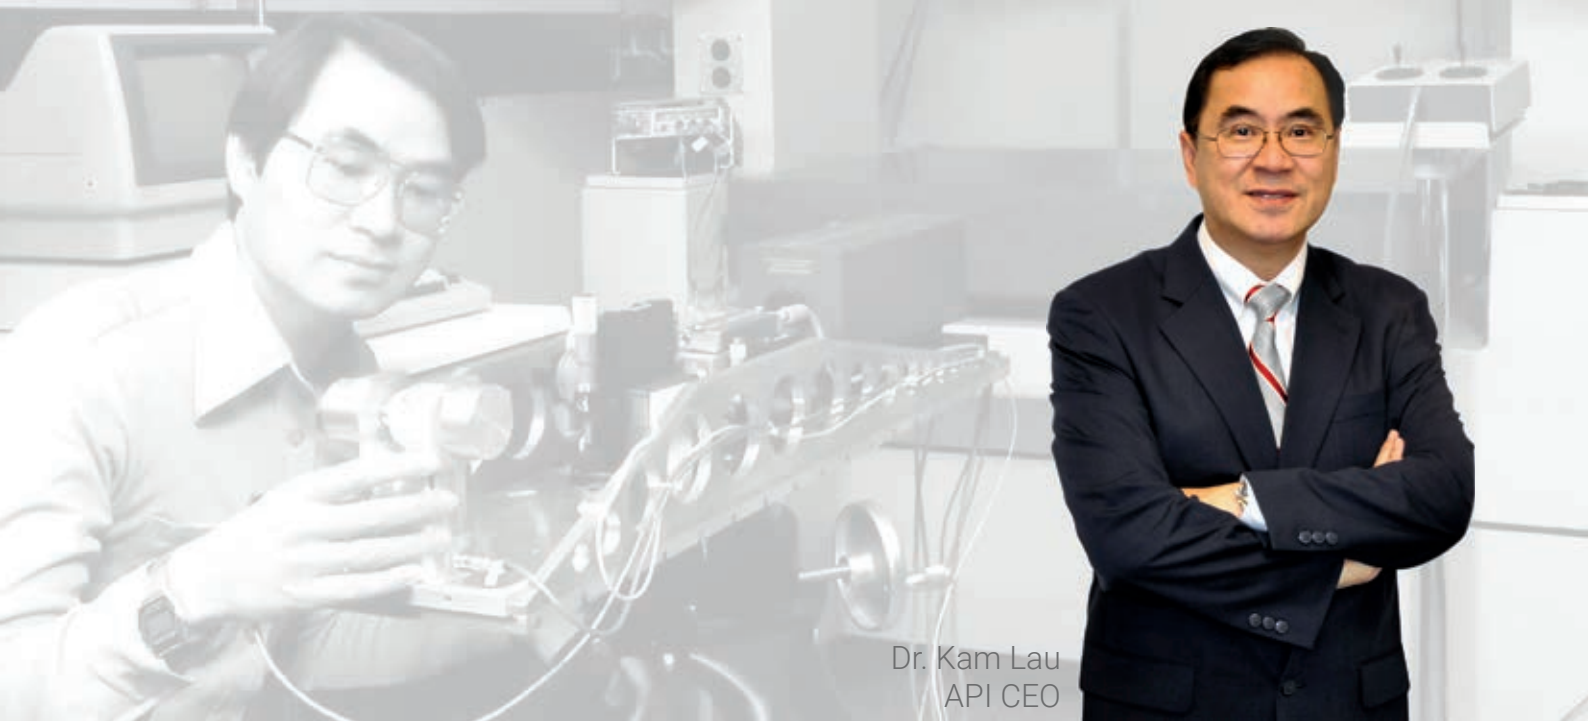




Dr. Kam Lau  
API CEO

## A VISION FOR INNOVATION

For more than 30 years API have pioneered laser-based equipment for measurement and calibration. API founder and CEO, Dr. Kam Lau, invented the laser tracker while working at USA's National Institute of Standards and Technology (NIST) to allow industrial robot accuracies to be determined. API shipped the world's 1st Industrial laser tracker to Boeing in 1988 and subsequently delivered the world's 1st 6D industrial laser tracker in 1989. API licensed its 3D laser tracker technology under a commercial agreement with Wild/Kern (now Leica) in 1989 allowing API to concentrate efforts on 5/6D laser tracker solutions for industrial manufacturing applications.

Today API is a global company with its laser trackers continuing to be the benchmark for metrology Automation, Precision and Innovation. API measurement and calibration products are at the heart of manufacturing organizations world-wide ensuring product quality and performance.

### RADIAN


|  |  <b>PRO</b> |  <b>PLUS</b> |  <b>CORE</b> |
|--|--|---|---|
| Laser Technology – ADM / IFM             | ADM/IFM - 3D/6D  | ADM - 3D/6D   | ADM - 3D  |
| Maximum Distance Range                   | 20m* / 50m / 80m*  | 50m / 80m*  | 50m / 80m*  |
| Wireless Operation                       |  | ✓   | ✓   |
| Ethernet                                 | ✓  | ✓   | ✓   |
| Hand-Held Probing (vProbe)               | ✓  | ✓   |   |
| Live Camera View                         | ✓  |   |   |
| Integrated Controller                    |  | ✓   | ✓   |
| Vertical, Horizontal, Inverted Operation | ✓  | ✓   | ✓   |
| Wide Angle iVision Fast Autolock         | ✓  | ✓   | ✓   |
| Battery Operation                        |  | 8 Hours   | 8 Hours   |
| Warranty                                 | 2 Years  | 2 Years   | 2 Years   |

\*Optional

# TECHNICAL PERFORMANCE

All specifications are calculated per the ASME B89.4.19 standard. Variation in air temperature is not included. Quoted values represent Maximum Permissible Error (MPE).

The typical accuracy values represent expected measuring performance.

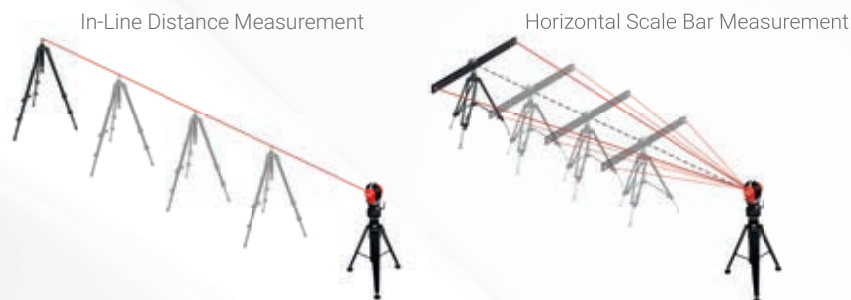

## In-Line Distance Measurement

| Range  | PRO       |         |           |         | PLUS |         | CORE |         |  |
|--------|-----------|---------|-----------|---------|------|---------|------|---------|--|
|        | MPE (ADM) | Typical | MPE (IFM) | Typical | MPE  | Typical | MPE  | Typical |  |
| 2-5m   | 10µm      | 5µm     | 2.5µm     | 1.5µm   | 15µm | 8µm     | 15µm | 8µm     |  |
| 2-10m  | 10µm      | 5µm     | 5µm       | 3µm     | 15µm | 8µm     | 15µm | 8µm     |  |
| 2-20m  | 14µm      | 7µm     | 10µm      | 5µm     | 15µm | 8µm     | 15µm | 8µm     |  |
| 2-25m  | 18µm      | 9µm     | 12.5µm    | 7µm     | 18µm | 9µm     | 18µm | 9µm     |  |
| 2-30m  | 21µm      | 11µm    | 15µm      | 8µm     | 21µm | 11µm    | 21µm | 11µm    |  |
| 2-35m  | 25µm      | 13µm    | 17.5µm    | 9µm     | 25µm | 13µm    | 25µm | 13µm    |  |
| 2-40m  | 28µm      | 14µm    | 20µm      | 10µm    | 28µm | 14µm    | 28µm | 14µm    |  |
| 2-50m  | 35µm      | 18µm    | 25µm      | 13µm    | 35µm | 18µm    | 35µm | 18µm    |  |
| *2-60m | 42µm      | 21µm    | 30µm      | 15µm    | 42µm | 21µm    | 42µm | 21µm    |  |
| *2-80m | 55µm      | 28µm    | 40µm      | 20µm    | 55µm | 28µm    | 55µm | 28µm    |  |

## Horizontal Scale Bar Accuracy\*\*

| Range | PRO       |         |           |         | PLUS  |         | CORE  |         |  |
|-------|-----------|---------|-----------|---------|-------|---------|-------|---------|--|
|       | MPE (ADM) | Typical | MPE (IFM) | Typical | MPE   | Typical | MPE   | Typical |  |
| 2m    | 28µm      | 14µm    | 28µm      | 14µm    | 35µm  | 18µm    | 35µm  | 18µm    |  |
| 5m    | 49µm      | 25µm    | 49µm      | 25µm    | 57µm  | 29µm    | 57µm  | 29µm    |  |
| 10m   | 85µm      | 43µm    | 85µm      | 43µm    | 92µm  | 49µm    | 92µm  | 49µm    |  |
| 20m   | 156µm     | 78µm    | 156µm     | 78µm    | 163µm | 82µm    | 163µm | 82µm    |  |
| 25m   | 191µm     | 96µm    | 191µm     | 96µm    | 198µm | 99µm    | 198µm | 99µm    |  |
| 30m   | 226µm     | 113µm   | 226µm     | 113µm   | 233µm | 117µm   | 233µm | 117µm   |  |
| 35m   | 262µm     | 131µm   | 262µm     | 131µm   | 269µm | 135µm   | 269µm | 135µm   |  |
| 40m   | 297µm     | 149µm   | 297µm     | 149µm   | 304µm | 152µm   | 304µm | 152µm   |  |
| 50m   | 368µm     | 184µm   | 368µm     | 184µm   | 375µm | 188µm   | 375µm | 188µm   |  |
| *60m  | 438µm     | 219µm   | 438µm     | 219µm   | 445µm | 223µm   | 445µm | 223µm   |  |
| *80m  | 580µm     | 290µm   | 580µm     | 290µm   | 587µm | 294µm   | 587µm | 294µm   |  |

\*Requires 80m range option

\*\*2.3m Scale Bar Length



15000 JOHNS HOPKINS DRIVE, ROCKVILLE, MD, 20850, USA  
PHONE: 240.268.0400 • INFO@APIMETROLOGY.COM  
APIMETROLOGY.COM

API EUROPE  
+49 (0) 6221-729-805-0  
INFO.EU@APIMETROLOGY.COM

API CHINA  
+86 10-59796858  
API-CN@APIMETROLOGY.COM

API BRASIL  
+55 12-3209-0675  
API-BR@APIMETROLOGY.COM

API INDIA  
+91 020.4860.7480  
API-IN@APIMETROLOGY.COM